

# Dahua Access Control & Temperature Monitoring Terminal

Temperature Monitoring / Face Recognition



Temperature Monitoring  
Distance: 0.3m-1.8m



Temperature Accuracy:  
 $\pm 0.5^{\circ}\text{C}$





Temperature Monitoring  
Speed: 0.35s





Easy Installation  
And Mobility

## Key Features

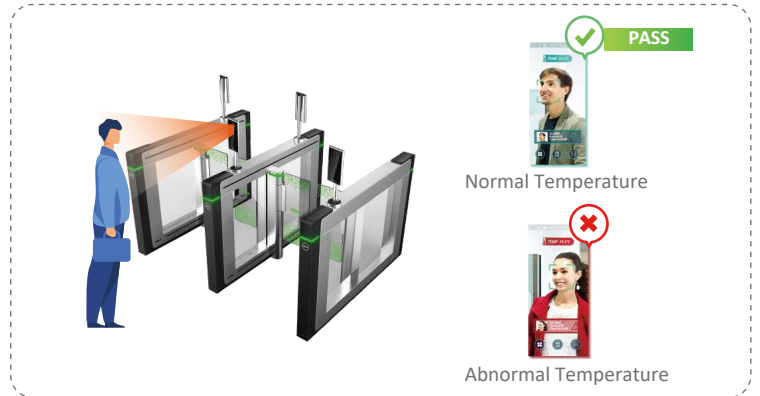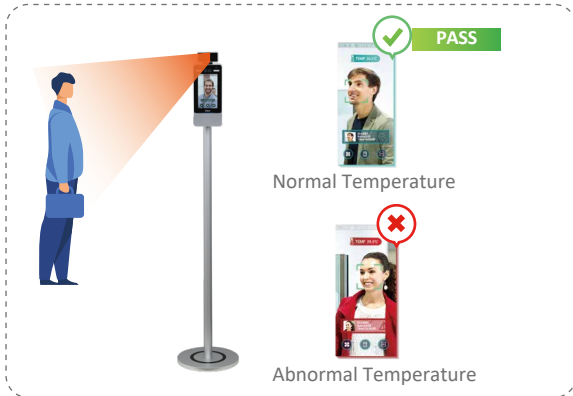

- Accurate monitoring of body temperature with an alarm function for abnormal temperature.
- Non-contact access to reduce cross-infection.
- Easy to install, easy to move.
- Large storage of face images and temperature information for easy back-tracking.
- Fast access to prevent congestion.

## Application Scenarios



## Products Selection



**DHI-ASI7213Y-V3-T1**

- Temperature Monitoring Accuracy:  $\pm 0.5^{\circ}\text{C}$
- Temperature Monitoring Distance: 0.3m~1.8m
- Sound Prompt: Abnormal temperature alarm



Wall Mounting:  
DHI-ASI7213Y-V3-T1



Desktop Mounting:  
DHI-ASI7213Y-V3-T1  
ASF072YV3-T1



Turnstile Integrated Mounting:  
DHI-ASI7223Y-A-V3-T1



Stand Mounting:  
DHI-ASI7213Y-V3-T1  
DHI-ASF172YV3-T1



DHI-VTH5341G-W (Android Based)  
DHI-VTH5421EW-H (Linux Based)



NVR5XXX-I



DSS Express

\* Design and specifications are subject to change without notice.

Ver. 2, Sep. 2020

## DAHUA TECHNOLOGY

No.1199 Bin'an Road, Binjiang District, Hangzhou, China. 310053  
Tel: +86-571-87688883 Fax: +86-571-87688815  
Email: overseas@dahuatech.com  
www.dahuasecurity.com

